




TKE 340 PA
Single head cutting-off machine



Control 01

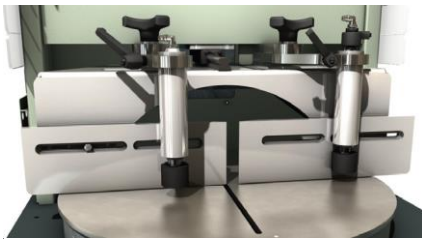


Clamps 02




04 03 02 01

The single head rising blade cutting-off machine, with left loading side, for cutting at angular settings from 15° to the left to 15° to the right and intermediate angles. Available with pneumatic blade feed.

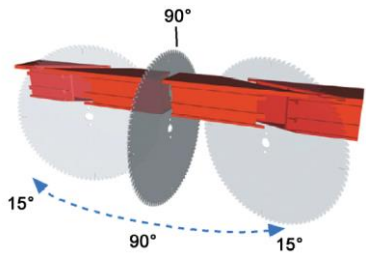

Cutting zone 03

Swarf drawer 04



TKE 340 PA

Single head cutting-off machine

01 Control

The control console allows user-friendly and intuitive machine operation.
The practical lever with scale serves for rapid angular positioning of the blade.
Instead, a further adjusting system allows adjustment of the clamp pressure and blade outfeed rate.

02 Clamps


Thanks to the technical solutions adopted, the horizontal and vertical clamps ensure the utmost rigidity in workpiece clamping as well as rapid repositioning of the clamps.
Such characteristic allows the use of this machine in window/door manufacture.

03 Cutting zone

The rugged horizontal worktable associated with the vertical fence allows optimum positioning of the piece to be cut, thus ensuring considerable accuracy of the cut surface.

04 Swarf drawer

A practical swarf drawer allows efficient collection of the processing debris thus ensuring clean conditions of the machine and work area.

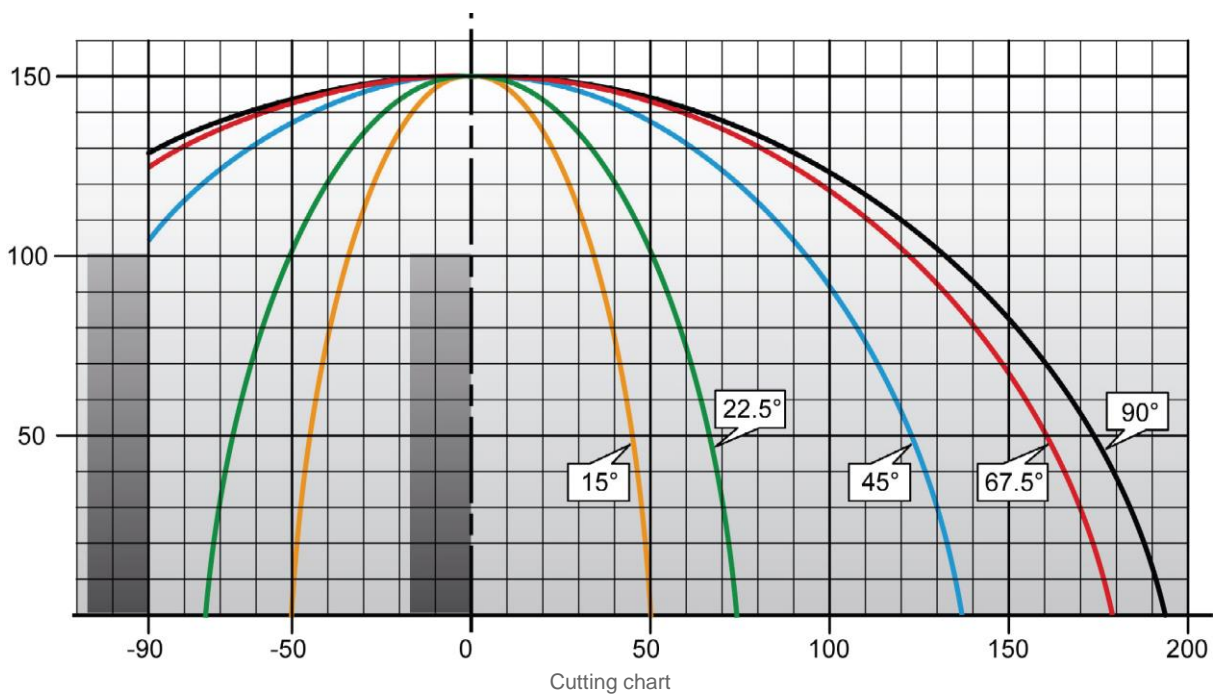

description and characteristics

BLADE

Carbide tipped (mm)	Ø = 400
---------------------	---------

BLADE FEED

Oleo-pneumatico	•
-----------------	---

CUTTING ZONE GUARDING

Full, manually operated	•
-------------------------	---

COOLANT SYSTEM

Spray-mist with oil emulsion	•
------------------------------	---

CLAMPS

Pair of vertical pneumatic clamps	•
-----------------------------------	---

Morse orizzontali aggiuntive opzionali	2
--	---

MOTOR

Three-Phase Motor (without brake)	•
-----------------------------------	---

Power (kW)	1,5
------------	-----

R.p.m.	2.800
--------	-------

- included
- available