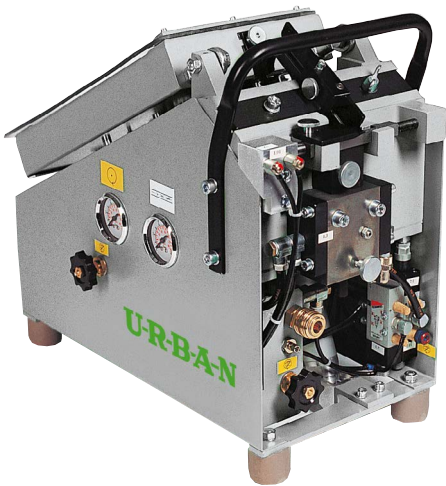


Screwing and feeding devices



ASS 60
Automatic
screw feeding device



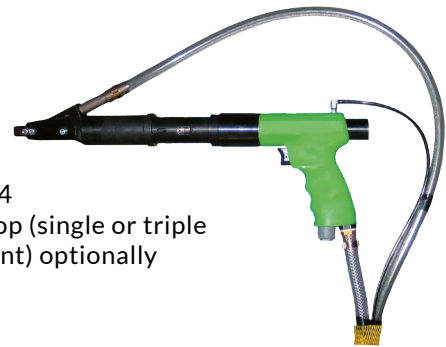
DSG 3105
Depth stop (single or triple
adjustment) optionally
available



DSS 3004
Depth stop (single or triple
adjustment) optionally
available



DSS 3104
Depth stop (single or triple
adjustment) optionally
available



DSG 2004
Depth stop (single or triple
adjustment) optionally
available



DSG 5040 TA 3
Depth stop, triple included
(further versions) for screw
lengths from 30-60 mm (available)

Product data sheet
Screwing and feeding devices
01/22 PR20002

Our know-how - your advantage

Screwdrivers in handle or bar type design

Handle type - DSG 2004, DSG 3105, DSG 5040 TA 3

Bar type - DSS 3004, DSS 3054, DSS 3104

are handy screwing devices for streamlined screwing. Further version upon request.

- automatic screw feed through external device (ASS 60)
- adjustable torque
- control impulse for screw feed via direct connection or via screwing depth stop

Complementary equipment

- depth stop (single or triple adjustable - exception: DSG 50xx TA 3-series)
- DSG 5xx/ES TA 3 optionally available with tubular shaped mouthpiece for cross corner brackets

Automatic screw feed system ASS 60










automatic screw transport to the individual screwing unit.










- automatic disconnection of pivot device when not in use
- compact through integrated pneumatic control
- wear-resistant by high-quality stainless steel container
- maintenance unit, tool set and pneumatic oil included

Workplace equipment

- guide rails, swivel arm etc. upon request

Technical information

	 H / B / T	 kgs	 V / Hz / VA	 l/min	 K Ø mm	 L mm	 S Ø mm	 Schr./min	 bar
DSG 3054**	435 270 525	26	-	max. 700	5 - 10	10 - 55	2,4 - 5	60 - 80	R 3,8" 7

	 L (mm)	 kgs	 l/min	 K Ø mm	 L mm	 S Ø mm	 Nm	 upm	 bar
DSG 2004	420	2,5	540	7 - 9	12 - 40	3,5 - 4,5	4 - 6,5	1500	R 3/8" 7
DSG 3105	335	1,5	574	5 7	10 - 25	2,4 - 3,5	0,5 - 2,0	1500	R 3/8" 7
DSG 5040	370	1,8	574	6 - 7,5	25 - 40	3,5 - 4,5	1,2 - 4,5	1500	R 3/8" 7
DSS 3004	425	2,2	570	7 - 9	12 - 40	3,5 - 4,5	3,7 - 6,5	1500	R 3/8" 7
DSS 3054**	490	2,3	570	9 - 11	17 - 55	4,5 - 5	3,7 - 6,5	1500	R 3/8" 7
DSS 3104	350	1,5	440	5 - 7	10 - 25	2,4 - 3,5	0,8 - 3,0	1300	R 3/8" 7

*) Torque not adjustable, only with depth stop
 **) Same design as DSS 3004, for longer screw dimensions / other screw dimensions upon request

Technical data are valid for basic machine without options. Size according to layout.

Urban GmbH & Co. Maschinenbau KG

Dornierstraße 5
 DE - 87700 Memmingen
 Tel.: +49 (0) 8331 858 - 0
 E-Mail: urban@u-r-b-a-n.com
 www.u-r-b-a-n.com

Subject to errors and modifications