


Mounting, checking and glazing units



KV 2800 HF

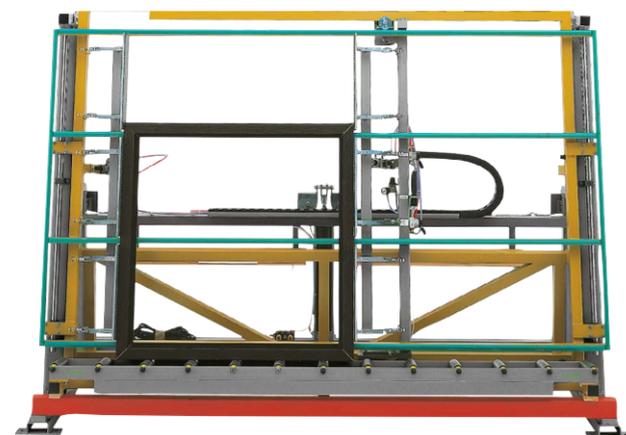

KV 1800

Product data sheet
Mounting, checking and glazing units
01/22 PR70002

Technical information

RA 3000

	330 kgs		L = 3000 mm B = 950 mm H = 1900 mm
	6 - 8 bar		b = 3000 mm
	63 litres		h = 1600 mm

	KV 1800	KV 2800	KV 2800 H	KV 3200		KV 1800	KV 2800	KV 2800 H	KV 3200
	350 kgs	420 kgs	500 kgs	550 kgs		L = 2800 mm B = 950 mm H = 2000 mm	L = 3650 mm B = 950 mm H = 2000 mm	L = 3650 mm B = 950 mm H = 2650 mm	L = 4200 mm B = 950 mm H = 2650 mm
	6 - 8 bar	6-8 bar	6-8 bar	6-8 bar		b = 1800 mm	b = 2740 mm	b = 2740 mm	b = 3200 mm
	65 litres	98 litres	98 litres	98 litres		h = 1600 mm	h = 1600 mm	h = 2200 mm	h = 2200 mm

KV 2800 HF

	500 kgs		L = 3650 mm B = 800 mm H = 2500 mm
	6 - 8 bar		b = 2740 mm
	98 litres		h = 2200 mm

	KV 2750 S	KV 3750 S		KV 2750 S	KV 3750 S
	500 kgs	600 kgs		L = 4000 mm B = 800 mm H = 2500 mm	L = 5000 mm B = 800 mm H = 2500 mm
	6 - 8 bar	6 - 8 bar		b = 2750 mm	b = 3750 mm
	80 litres	80 litres		h = ca. 2300 mm	h = ca. 2300 mm

Technical data are valid for basic machine without options. Size according to layout.

Urban GmbH & Co. Maschinenbau KG

Dornierstraße 5
DE - 87700 Memmingen
Tel.: +49 (0) 8331 858 - 0
E-Mail: urban@u-r-b-a-n.com
www.u-r-b-a-n.com


Assembly stand RA 3000

for frame pre-assembly and sash mounting. Stepless pneumatic height adjustment by 500 mm via proven cable pull technique.

- frame clamping through two laterally adjustable flat clamping cylinder units
- flat clamping cylinder unit fully retractable below the contact surface

- Sliding bars or felt cover to ensure an easy and smooth frame transport (if felt cover is requested, please state when order is placed).

Options: drive unit FH 10.2 and FHS

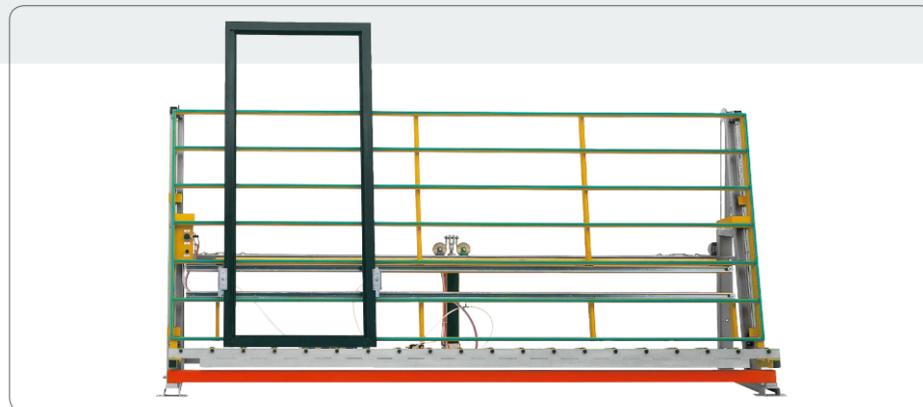

Control and glazing unit KV 2800 HF

for fixing window elements for glazing and control work.

- both clamping bars are pneumatically retractable below the contact surface; therefore easy and smooth infeed and outfeed
- solid basic design ensuring high stability

- clamping pressure adjustable via pressure regulator with manometer
- sliding bars or felt cover to ensure an easy and smooth transport of the window (if felt cover is requested, please state when order is placed)
- stationary clamping bar on the left as standard, by request on the right (please advise when order is placed)



Control and glazing unit KV 1800, 2800, 2800 H, 3200


for fixing window elements for glazing and control work.

- both clamping bars are pneumatically retractable below the contact surface; therefore easy and smooth infeed and outfeed
- solid basic design ensuring high stability

- clamping pressure adjustable via pressure regulator with manometer
- sliding bars or felt cover to ensure an easy and smooth transport of the window (if felt cover is requested, please state when order is placed)
- stationary clamping bar on the left as standard, by request on the right (please advise when order is placed)

Options:

- sealing stops
- cutout for window drip, 50 mm high, 120 mm deep
- driving unit FH 10.2 and FHS

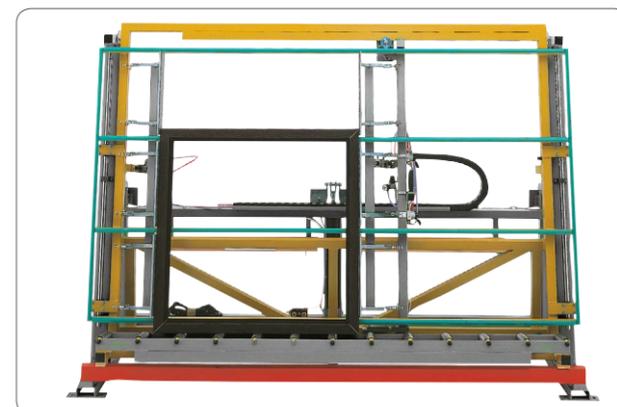

Control and glazing unit KV 2750 S and KV 3750 S

for fixing window elements for glazing and control work.

- both clamping bars are pneumatically retractable below the contact surface; therefore free throughput of elements
- rack guide for absolute angle precision

- very solid basic design ensuring high stability
- stepless pneumatic height adjustment by 500 mm
- easy and smooth element transport. Rear contact surface optionally available with sliding bars, felt strips or rubber rollers (rubber rollers against surcharge)

